

Dosing Solutions

25 m³/h

MixRite™ TF-25

Technical Information

Water pressure
Flow Rate
Working temp
Coupling

1 – 8 bar (14.7 – 120 PSI)
0.2 – 25 m³/h (0.9–110 GPM)
4–40° C (39.2–104° F)
2" or 63 mm

* Legs – Standard supply

Applications

Fertigation


Chlorination

Available options

Manual
ON/OFF

Hydraulic
ON/OFF

Electric
ON/OFF

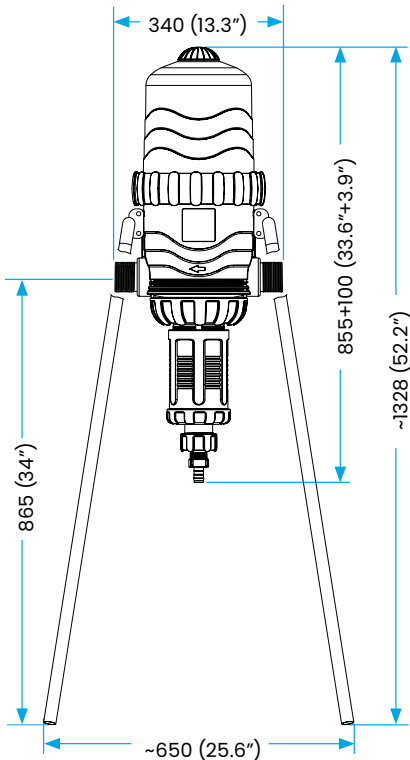

Application Color Code


Application	Sleeve Color	TEFEN Code	Seal Material	Spring Material
Irrigation		STD	NBR	SST, Hastelloy
Chlorine		CL	Viton	Hastelloy

L (Hight)		
	On/Off	Air Release
Max.	1030 (40.5")	1000 (39.3")
Min.	880 (34.6")	900 (35.4")

Application Range

Dosage Rate %	Flow Rate Range	Pressure Range	Connectors Dia. Thread	Min-Max Injection Rate Per Hour	Suction Tube Dia.	Gross weight std unit
0.1% - 1%	0.2 - 25 m³/h	1 - 8 bar	2" BSPT	0.2 - 250 l/h	25 mm	18.5 KG
0.3% - 2.5%	0.2 - 25 m³/h	1 - 8 bar	2" BSPT	0.6 - 625 l/h	25 mm	18.5 KG
1% - 5.5%	0.2 - 25 m³/h	1 - 8 bar	2" BSPT	2.0 - 1375 l/h	25 mm	18.5 KG

Pressure Loss

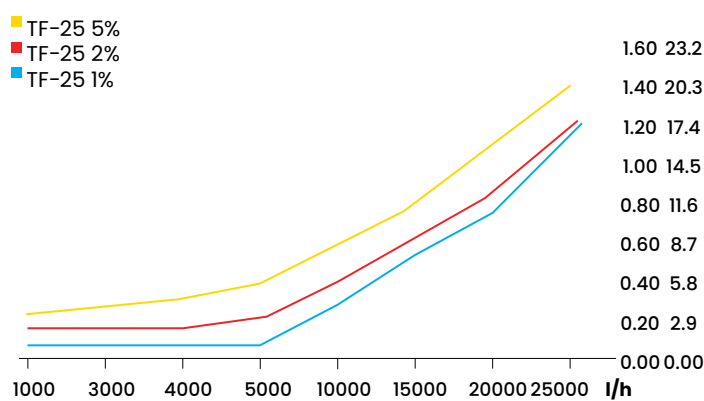

Max. injection rate/h

